


PRIMA

Back to Back DOOR PULL HANDLE

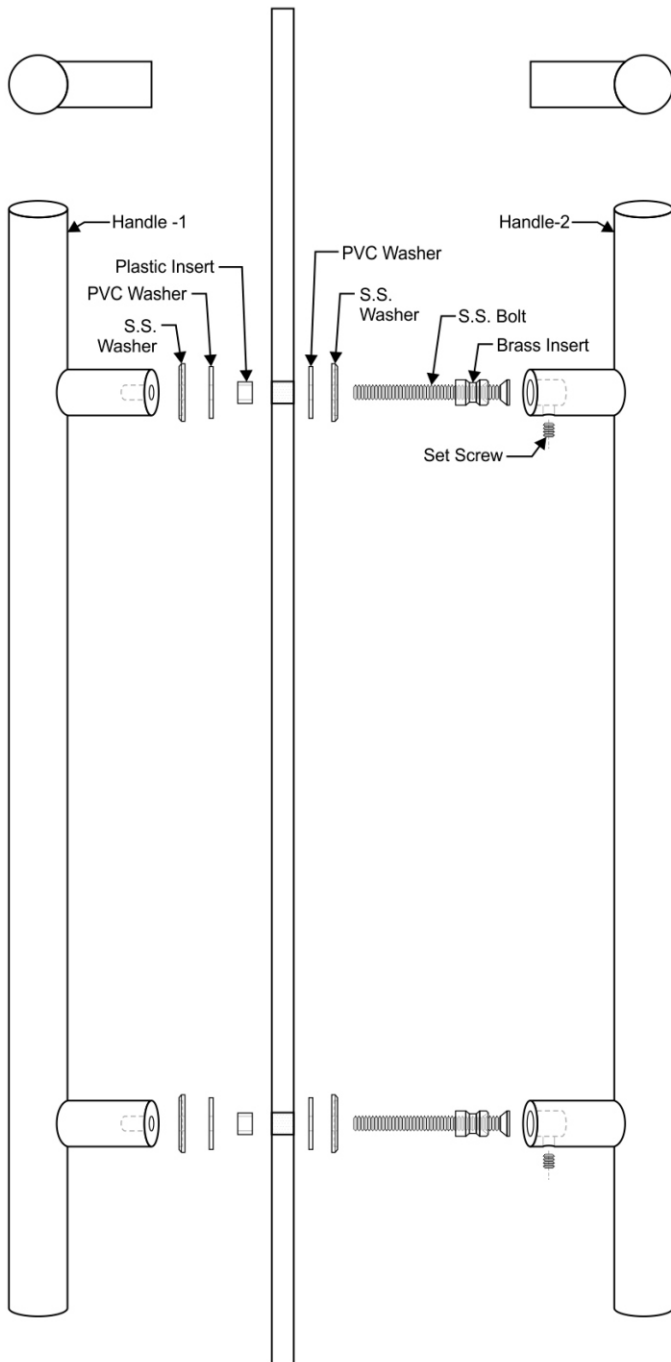

Back to Back Door Pull Handle installation Guide

- Step -1** Position the Handle at your required position on the door (Use water leveler)
- Step -2** Mark top and Bottom fixing hole locations to the same distance as the Centre to Centre point distance of the Pull handle support posts that affix to the door.
- Step -3** On this mark, Drill throughout Holes for 12 mm thread at the top and bottom points to accommodate fixing Bolts.
- Step -4** Place handles on the front side of the door. Backed with SS (steel) washer and PVC washer facing holes. Fit Internal Pull Handle (M8 Thread Side) into Position with SS Washer, PVC Washer.
- Step -5** From inside face of Door, Insert M8 Bolt with PVC Insert, Brass Insert, SS, and PVC Washer in into the Door holes
- Step -6** Begin Tighten both M8 Bolts with Allen Key.
- Ste -7** Once Bolts are tight, check handle is properly tight. Insert internal Pull handle on the bolts (Grub screw-in standoff) into position & install & Tighten Grub screw with Allen key.

Care and Maintenance of Pull Handle

Please do Regularly:

- Clean regularly with a normal and dry cotton clean cloth.
- Clean through normal water and clean with dry cloth.
- Please wrap of Pull Handle if construction / Painting or other works are ongoing on-site.

Don't

- Don't use Abrasive Material, Floor and Glass cleaner, All Purpose Cleaner, Chlorine Bleach, Acidic cleaner, etc.
- Avoid any contact with Color Paint, Cement, Putti, Iron metal, etc.

For more information Call
Toll Free 1866 691 1122 or
email : info@primadecorativehardware.com