



MATCH THE FLOOR VENT COVER
INSTALLATION INSTRUCTIONS



REMOVE THE OLD VENT COVER

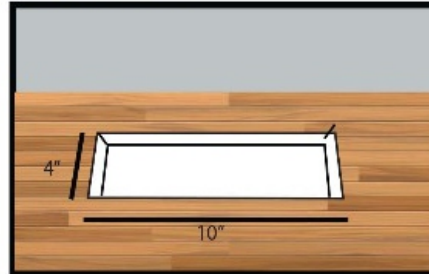


MEASURE THE SIZE OF DUCT OPENING

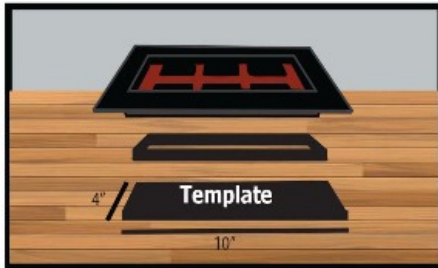

VENT COVER, RECTANGLE FRAME AND TEMPLATE




MARK AND CUT THE FLOORING MATERIAL

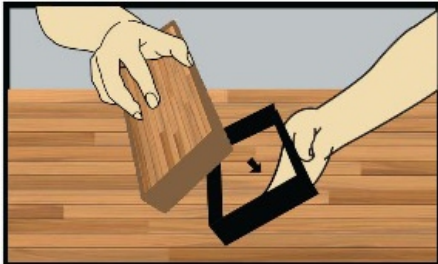


INSERT THE CUT PIECE INTO RECTANGULAR
LOOSE FRAME




REMOVE THE PROTECTIVE TAPE LAYER

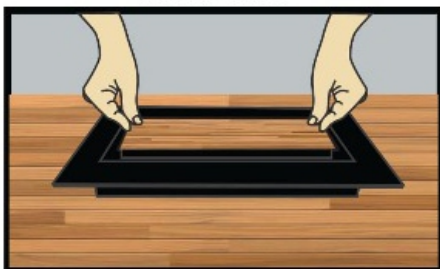


PLACE CUT PIECE ON ADHESIVE TAPE
AND PRESS FIRMLY

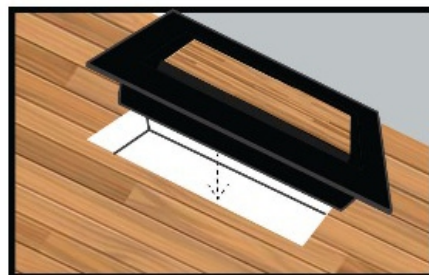

INSTALL THE VENT COVER ON THE FLOOR

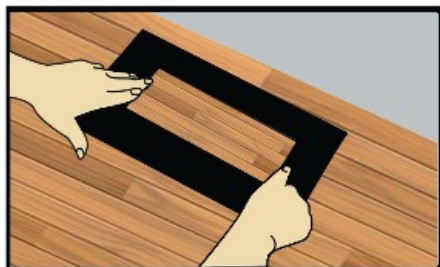

ADJUST THE AIR FLOW

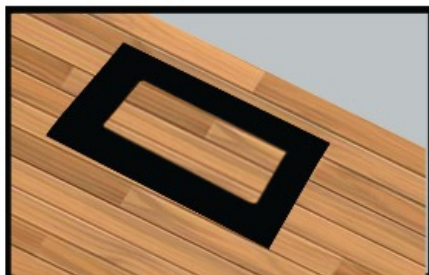

PRIMA VENT COVER IS SUCCESSFULLY INSTALLED

Prima-Match the Floor Vent Covers and Register

Match the existing surrounding floor surface. Paste your matching floor-cut piece inside the vent cover and drop it into the duct opening. The vent covers are compatible with various flooring materials, including hardwood, laminate, tile, carpet, vinyl, ceramic, marble, and drywall, as long as the material is up to 19 mm thick. The drop-in design ensures a seamless and matching look with existing flooring surfaces. It comes with a steel damper at the back to control airflow. These floor registers are made from durable sand-cast aluminum and can withstand regular light foot traffic without bending or breaking.

Installation Instructions

Easy Installation: Use a Jig saw, or table saw to cut out a piece of your existing flooring material that fits inside the rectangle frame. Use the rectangle frame or MDF template to mark the size you need to cut, Place the template on top of the flooring material and mark. Carefully cut along the marked lines to create the flooring cut piece. Insert the cut piece into the rectangle frame.

Ensure it matches the size and shape of the rectangle frame and covers any uneven edges. Check the thickness, and confirm that the flooring material is no thicker than 19 mm. If it's thinner, you'll need to use spacers to flush it with the frame.

Remove the protective film layer of double-sided tape, place the flooring cut piece on the tape within the rectangle frame, and maintain an equal gap on all four sides of the frame to ensure it's centered press gently to secure the flooring cut piece to the base frame, make sure it sticks properly on the tape.

Install and drop your Match the Floor vent cover into the duct opening, Ensure that the floor vent cover is securely in place, and looks even and well-aligned with the surrounding flooring.

Note: Always exercise caution when using cutting tools and handling materials to ensure a safe and precise installation. We suggest getting it installed by professionals.

Thanks for choosing Prima products .